

For universal use.

E.g. for simple spot repair use at the lacquer drying.

Optron IR-modules work in a shortwave IR-range.

The shortwave energy penetrates the lacquer coating and dries it from the inside. This means being able to work with higher performance output without having to risk bubble formation, which results in a shorter drying time.

- ▶ 100% power within 1-2 seconds
- ▶ Connected load: 3 kW; 400 V + N + PE (50/60 Hz)
- ▶ Connection box with mains switch
- ▶ Two integrated fans guarantee also at continuous operation small casing temperature and long lifetime of the IR-emitter.
- ▶ All adjustments lockable through rotary levers
- ▶ Drying area approx. 0.8 x 0.5 m (W x H)
- ▶ Working height: min. 0.1 m / max. 1.65 m
- ▶ 10 m connecting cable with 16 A CEE-plug
- ▶ Up to 3 stands at 3 kW each can be connected to a 16 A CEE socket by using a junction

The IR-module can be moved up and down on the profile rail.
It can be rotated and tilted too (see diagram).



Pictures are approximations

Stand (without IR-module)

Item-no.: 600.1755

IR-module 750 K / KL2

3 kW, shortwave IR-emitter

length 750 mm

Item-no.: 600.1756.2



IR-module 750 SM / KL2

3 kW, fast medium wave IR-emitters

with reduced dazzle effect

length 750 mm

Item-no.: 600.2039.2

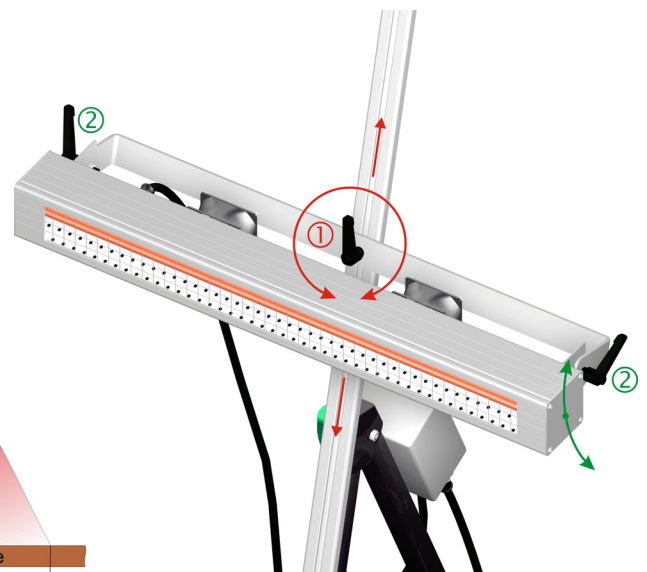

All prices excl. VAT – June 2019

Z:\Publishingdaten\prospekte\infrarotstrahler\stative\KL-2 Stativ\KL-2_Stativ_eng.doc

All pictures are approximations
Documentation last updated: 26.06.19

OPTRON GMBH • Steinriede 12 • D-30827 Garbsen / Hannover • Germany

Phone : +49 (0)5131 7083 - 0 • Fax. : +49 (0)5131 7083 - 25

www.optron-gmbh.de • e-mail: mail@optron-gmbh.de